



CITGO HYDURANCE™ AW CP FLUID

Date 06/15

DESCRIPTION: CITGO HyDurance AW CP Fluid is a premium multigrade anti-wear hydraulic fluid designed for applications where dielectric (insulating) properties are required. CITGO HyDurance AW CP Fluid offers wide temperature range service in mobile hydraulic equipment, particularly in low temperature conditions where excellent cold start up hydraulic system performance is required.

- QUALITIES:**
- High dielectric strength
 - Superior low-temperature flow and pumpability
 - Fluid film strength for warmer climates
 - Excellent antiwear properties
 - Foam resistant
 - Rust and corrosion protection
 - Long service life
 - Water separation characteristics
 - Excellent viscosity shear stability


APPLICATIONS: CITGO HyDurance™ AW CP Fluid is recommended for most outdoor and/or mobile hydraulic equipment requiring a fluid with high dielectric strength properties such as “cherry picker” lift applications. It provides excellent service in equipment used under a wide range of operating conditions and where hydraulic system response is critical such as:

- Tree trimming, fruit picking mobile equipment
- Firefighting lift trucks, buckets, etc.
- Aerial lift buckets
- Mobile hydraulic systems
- Garbage collection equipment
- Public utility vehicles
- Construction equipment in colder services



CITGO HyDurance™ AW CP Fluid meets or exceeds the following:

- Dielectric Strength, ASTM D 877, 35 KV minimum
- ASTM D 6158 HM (2005)
- Parker Denison HF-0 (Revision J)
- DIN 51524-2 (2006)
- Eaton Brochure 03-401-2010
- General Motors LS-2 (1997)
- JCMAS HK P041 (2004)
- ISO 11158 HM (FDIS 2008)
- SEB 181 222 (2007)

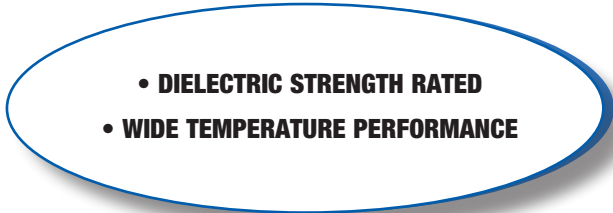

(Continued)

**CITGO HYDURANCE™ AW CP FLUID**

Date 06/15 - (Continued)

TYPICAL PROPERTIES:**CITGO HYDURANCE™ AW CP FLUID**

Material Code	633623001
Gravity, ASTM D 4052, °API	30.8
Density, lb/gal	7.26
Flash Point, COC, ASTM D 92, °F (°C)	367 (186)
Color	Blue-green
Viscosity, ASTM D 2983, cP at -40°C	20,450
cP at -23°C	1,590
cP at -18°C	860
ASTM D 455, cSt at 40°C	25.6
cSt at 100°C	5.4
Viscosity Index, ASTM D 2270	155
Pour Point, ASTM D 97, °F (°C)	-54 (-48)
Aniline Pt., ASTM D 611, °F	204
Total Acid Number, ASTM D 664	0.6
Turbine Oil Oxidation, ASTM D 943, hrs	2775
Turbine Oil Rust Test, ASTM D 665, A and B	Pass
Water Separability, ASTM D 1401, at 130°F (54°C)	40-40-0 (10)
Dielectric Strength, ASTM D 877, KV, minimum	35

CITGO is a registered trademark and HyDurance is a trademark of CITGO Petroleum Corporation. All other registered trademarks or trademarks are the property of their respective owners.