



CITGO CONCRETE FORM OIL

Date 04/18


DESCRIPTION: CITGO Concrete Form Oil is a light colored, non-staining, low volatile organic content (VOC) oil for use on concrete forms where an excellent surface finish is desired.

QUALITIES: CITGO Concrete Form Oil is specially formulated with high quality base stocks and additives including a combination spreading and release agent which:

- Provides excellent surface finish.
- Provides even spreading of the oil on wood or steel forms and prevent cement sticking to forms.
- Prevents staining, build-up and corrosion of forms.
- Meets U. S. EPA AIM and OTC Phase I State VOC requirements.

APPLICATIONS: CITGO Concrete Form Oil may be used for all concrete form applications. With excellent non-staining characteristics, it is recommended for applications requiring excellent surface finish including production of burial vaults, white stone furniture and other specialty concrete products.

Meets EPA AIM VOC Requirements

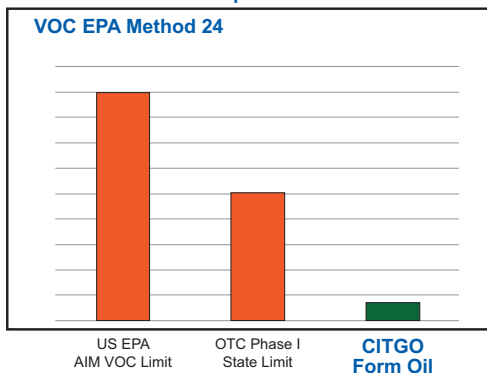

TYPICAL PROPERTIES:

CITGO CONCRETE FORM OIL

Material Code	643205001
Gravity, ASTM D4052, °API	27
Density, lb/gal at 60°F	7.43
Flash Point, COC, Min., ASTM D92, °F (°C)	384 (196)
Viscosity, ASTM D445, cSt at 40°C	20
cSt at 100°C	3.8
ASTM D2161, SUS at 100°F	106
SUS at 210°F	39
Viscosity Index, ASTM D2270	70
Pour Point, Max, ASTM D97, °F (°C)	-33 (-36)
Color, ASTM D1500	1.0
Saponification No., ASTM D94	10.8
Copper Corrosion, ASTM D130	1A

CITGO is a registered trademark of CITGO Petroleum Corporation. All other registered trademarks or trademarks are the property of their respective owners.