



CITGO® CITGARD® 1000 Full Synthetic Heavy Duty Engine Oils

Formerly CITGO® CITGARD® SynDurance® Plus Synthetic Heavy Duty Engine Oils

OVERVIEW




- Advanced fuel efficiency formula delivers maximum fuel economy, extreme cold temperature performance, and superior engine durability. A careful balance of synthetic base oil components and a shear stable viscosity modifier ensures that heavily loaded engine parts have protective oil films.
- Meet the performance requirements of newer engines operating at higher temperatures, with lower RPM, higher torque, and advanced combustion design.
- Field-tested for over a million miles with engine teardown inspections. The results indicate superior wear protection and oil consumption control, as compared to premium SAE 15W-40 viscosity grade oils.

FEATURES & BENEFITS



- Up to 4% fuel economy advantage over conventional SAE 15W-40 viscosity grade oils.
- Longer starter/battery life with reduced dependency on block heaters, resulting in lower energy costs.
- Up to 100% increase in oxidation protection compared to conventional CJ-4 engine oils (based on Volvo T-13 oxidation results). Always follow OEM recommendations when extending oil drain intervals.
- Reduced air entrainment in high-pressure fuel injection systems.
- Address the environmental challenge of reducing greenhouse gases and carbon footprint.

APPLICATIONS



Approved for equipment requiring:
 API CK-4, CJ-4, CI-4 Plus, CI-4, CH-4/SN (SN applies to 5W-40 only)
 Cummins CES 20086
 Detroit Diesel DFS 93K222
 Volvo/Mack/Renault – VDS-4.5/EOS-4.5/RLD-3
 Ford WSS-M2C171-F1

Recommended for equipment requiring:
 Caterpillar ECF-3
 Mercedes 228.31
 Paccar
 Navistar
 MAN M3575
 Allison TES 439 (5W-40 only)

PROPERTIES




Typical Properties for CITGO CITGARD 1000 Full Synthetic Heavy Duty Engine Oils:

	5W-30	5W-40
Material Code	622676001	622677001
Gravity, ASTM D4052, °API	33.6	33.8
Pounds Per Gallon	7.14	7.14
Flash Point, COC, ASTM D92, °F (°C)	428 (220)	453 (234)
Viscosity ASTM D445		
cSt at 40°C	70	88
cSt at 100°C	11.3	14
Viscosity Index, ASTM D2270	156	163
CCS Vis, ASTM D5293, cP at °C	6,400@ -30° C	6,350 at -30°C
MRV Vis, ASTM D4684, cP at °C	21,970 at -35°C	30,060 at -35°C
MRV Yield Stress, ASTM D4684, Pa at °C	<35 @ -35°C	<35 @ -35°C
Pour Point ASTM D97, °F (°C)	-38°F (-39°C)	-44°F (-42°C)
TBN (Total Base No.), ASTM D2896	11	11
Color, ASTM D1500	L5.5	L5.5
NOACK Volatility, ASTM 05800, % Loss	11.5	11.9

Low Temperature Pumpability Comparison

How much wear occurs waiting on 15W-40?

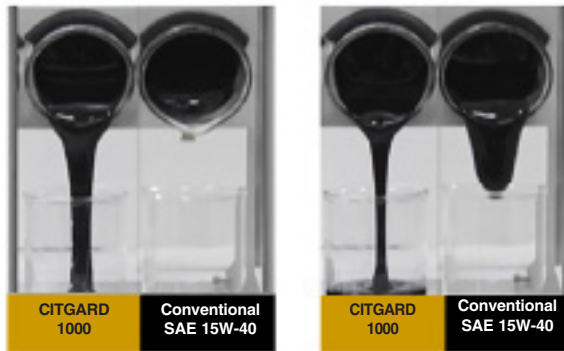

3 seconds

7 seconds

Cold box testing at -22°F (-30°C) of used oil demonstrates the superior flow characteristics of CITGARD 1000 Full Synthetic 5W-40

Fuel Savings Advantage

Savings Category	Conventional 15W-40	CITGARD® 1000 5W-30	Savings*
Number of Units	100	100	
Annual Miles/Unit	100,000	100,000	
MPG	6.50	6.76	
Fuel Savings % Increase	None	4.00	
Fuel Cost	4.00	4.00	
Annual Unit Fuel Gallons	15,384	14,792	592
Annual Unit Fuel Cost	\$61,536	\$59,168	\$2,368
Fleet Annual Fuel Gallons	1,538,400	1,497,200	59,200
Total Savings			\$236,800

*Savings is example only—Individual fleet result will vary

CITGO, CITGARD and SynDurance are registered trademarks of CITGO Petroleum Corporation. All other registered trademarks or trademarks are the property of their respective owners. Values shown are typical values only and do not constitute a specification. The information contained herein is subject to change without notice.